

WE ARE READY

BROUGHT TO YOU BY

CARSON
OUR CUSTOMERS | OUR PEOPLE | OUR COMMITMENT





AMERICA'S NUMBER ONE IN FUEL STORAGE.

Whether its building a new bridge over a waterway, providing critical standby power to a large medical facility, or powering an outdoor rock concert, our customers have one thing in common. They need a cost effective, environmentally secure and safe source of fuel that's reliable and ready to go.

CONTENTS

About Western

Industries We Serve	4
Applications We Serve	5
Small & Large Fuel Tank Ranges	8

Small Fuel Tank Range

TransCube Global	10
TransCube Mobile Refueler	12
FuelCube	14

Small Tank & Accessory guide

Small Tank & Accessory Guide - Quick Reference Chart	16
Build Your Tank Worksheet	30

Large Fuel Tank Range

EnviroCube Global	32
TransTank Global	34
TransTank Pro	36
UL2085	38

Large tank & Accessory guide

Large Tank & Accessory Guide - Quick Reference Chart	40
--	----

Success Stories

Truck or Trailer Tank? Flexibility For Fuel On The Move	54
Fuel Chain: Powering The USA's Biggest Construction Site	55



60 YEARS OF BEING READY

We began life as a small tank fitting operation in the UK. 60-years later, through sustainable organic growth and strategic acquisition, we've become global leaders in the business of storing and handling fuels and lubricants.

100,000 TANKS

We've supplied over 100,000 tanks to customers and rental partners in construction, refining and mining, energy, transport and defense – from complex custom builds to ex-stock products.

4 OFFICE LOCATIONS

We currently have 4 facilities supporting our customers all across North America. To provide you with local support, our qualified in-house engineering, design and compliance teams, backed by 60-year experience, can help you select the right tanks and dispensing equipment.

DRIVING EFFICIENCY

Our products save time, labour, and costs, making you more profitable. Our expertise and variety of solutions ensure you and your customers are always ready.

WE ARE WORLD LEADERS IN THE SAFE
AND SECURE STORAGE OF FUEL. FROM
CONSTRUCTION SITES TO DISASTER
ZONES, OUR MODULAR SOLUTIONS
GUARANTEE A READY AND RELIABLE
SOURCE OF FUEL WHENEVER AND
WHEREVER YOU NEED IT.



FUEL
DISTRIBUTION



POWER
GENERATION



GOVERNMENT
AND DEFENSE



RENEWABLE
ENERGY



CONSTRUCTION



AGRICULTURE



MINING



RENTAL

READY FOR TOMORROW, TODAY

Some customers know exactly what kind of fuel storage they need. Others have fueling problems and want to discover how our solutions can solve them. All are looking for cost savings, efficiency, and ROI.

Whether it's fuel storage for a residential construction project, a generator back up tank, or a complex solution for a major infrastructure project, we have you covered.



APPLICATIONS WE SERVE

Refuelling Made Easy

Our transportable tanks guarantee a consistent fuel supply when and where you need it. They deliver cost-savings and peace of mind by reducing reliance on regular small deliveries from external contractors – giving you complete control of your energy. Moving fuel is easy on the toughest terrain and hard to access sites, with the highest levels of safety and security.

CHALLENGE READY





SMALL & LARGE FUEL TANK RANGES

Our small and large fuel tanks reflect a 60-year history of helping customers store, move and dispense every kind of fuel – from diesel to renewables and biofuels. We’re recognized as the market leader in providing environmentally secure and reliable energy wherever you need it. Our product range is available for fast delivery, so it’s ready to use when it arrives on your site. If the solution you need is not shown here, our in-house engineering team stands ready for the opportunity to help tackle the challenge.

FIND THE STORAGE SOLUTION THAT WORKS FOR YOUR NEEDS.

SMALL



PRODUCT	TransCube Global	TransCube Mobile Refueler	FuelCube
Page	10-11	12-13	14-15
Capacity	132 - 2,388 USG	251 - 1,204 USG	243 - 1,862 USG
Transportable (full)	YES		NO
Containment	110% - Double walled		
Design approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30	UL142, CAN/ULC-S601, US DOT, TRANSPORT CANADA, UN-IBC	UL142, CAN/ULC-S601

LARGE



PRODUCT	EnviroCube Global	TransTank Global	TransTank Pro	UL2085
Page	32-33	34-35	36-37	38-39
Capacity	3,014 - 13,703 USG	2,510 - 5,614 USG	3,223 - 18,175 USG	1,222 - 2,822 USG
Transportable (full)	NO	YES	NO	
Containment	110% - Double walled			
Design approvals	NFPA 30, CAN/ULC-S601, UL142	DR, 49CFR (US DOT), UN T9 Portable Tank, CSC, ISO1496/3, RID, TIR, IMDG, UL142 Frame approvals: CSC plated ISO container	UL142, ULC-S601, AS1940, AS1692, AS1657	UL142, ULCS601, UL2085, ULSCS655, California CARB

TRANSCUBE GLOBAL 132- 2,388 US GALLONS

The TransCube Global is a transportable, environmentally friendly double-walled fuel storage tank, that offers an efficient solution for on-site fueling and auxiliary supply. With its fully transportable design and ability to fuel multiple pieces of equipment simultaneously, the TransCube will save you time and double or triple the run times of your equipment.



FEATURES

LOCKABLE EQUIPMENT CABINET

Equipment and ports are secure and spills are contained. Secure hose access enables fueling while cabinet is locked.



CORNER BRACKETS

Liftable by crane and easily stackable: two high full and three high empty.

GALVANIZED FRAME

Strong, durable and secure structure with added protection from bumps and scratches.

DOUBLE WALLED 110% CONTAINMENT

Built-in, weatherproof secondary containment eliminates the need for pans or basins.

REMOVABLE INNER TANK

For routine cleaning, maintenance and inspection.

INTERNAL BAFFLES

Designed to maximize stability when handling the tank full of fuel.

FOUR WAY FORKLIFT POCKETS

Quick and easy maneuvering and mobility.



IDEAL USES AND APPLICATIONS

ONSITE FUEL SUPPLY

Easily refuel machinery on site when needed and cut back on fuel delivery waiting times.

GENERATOR AND AUXILIARY EQUIPMENT

TransCube fuel tanks have the ability to quickly and efficiently connect to three diesel powered pieces of equipment and refuel equipment via pump at the same time.

FUEL TRANSPORT

Meeting multiple worldwide transport regulations, the TransCube can transport fuel safely anywhere you need it.

MODELS AND CAPABILITIES



SPECIFICATIONS	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG
Capacity (Nominal / safe fill 95%)	132/ 125 USG	251/ 238 USG	552/525 USG	787/ 748 USG	999/ 949 USG	1,204/ 1,144 USG	2,388/ 2,269 USG



TRANSCUBE MOBILE REFUELER 251 - 1,204 US GALLONS

TransCubes can be mounted to a DOT approved trailer for a complete mobile fuel solution. The TransCube Mobile Refueller is designed for travel on construction sites and between projects. This fuel trailer is the most reliable, environmentally secure solution for refueling machinery and equipment on the move.



FEATURES

LOCKABLE EQUIPMENT CABINET

Equipment and ports are secure and spills are contained. Secure hose access enables fueling while cabinet is locked.



REMOVABLE INNER TANK

For routine cleaning, maintenance and inspection.

INTERNAL BAFFLES

Designed to maximize stability when handling the tank full of fuel.

MOBILITY

Designed around mobility, the TransCube Refueler enables easily refueling around any site.

CORNER BRACKETS

Liftable by crane and easily stackable: 2 high full and 3 high empty.

DOUBLE WALLED, 110% CONTAINMENT

Built-in, weather proof secondary containment eliminates the need for pans or basins.

FOUR WAY FORKLIFT POCKETS

Quick and easy maneuvering and mobility.

IDEAL USES AND APPLICATIONS

HIGHWAY FUEL TRANSPORT

The UN DOT approved trailer features lights and electric brakes for unmatched durability and ease of use. This towable unit offers fuel transport convenience, allowing you to travel at ease between job sites and depots.

FAST MOBILE REFUELING

The TransCube Mobile Refueler is a safe and reliable fuel storage solution for any location that requires quick refueling of any type of construction or auxiliary equipment.

ROAD WORK REQUIREMENTS

Due to its highway approved design, this tank solution is ideal for road work and work sites that require fuel transportation across highways. Our mobile refueler tanks can be towed and quickly moved to machinery, vehicles, generators and any other equipment.

MODELS AND CAPABILITIES



SPECIFICATIONS

Capacity
(Nominal /
safe fill 95%)

H10TCG-EB

H20TCG-EB

H30TCG-EB

H40TCG-EB

H50TCG-EB

251/ 237 USG

552/525 USG

787/ 748 USG

999/ 949 USG

1,204/ 1,144 USG



FUELCUBE 243 - 1,862 US GALLONS

The FuelCube is a compact and economic stationary fuel tank designed for onsite fuel supply and fleet refueling. The FuelCube includes features such as an integral, lockable equipment cabinet for security and 4-way forklift pockets for easy mobility when empty.



FEATURES

LOCKABLE EQUIPMENT CABINET

Equipment and ports are secure and spills are contained. Secure hose access enables fueling while cabinet is locked.



STACKABLE CORNER BRACKETS

Easily stackable up to two high when empty.

DOUBLE WALLED 110% CONTAINMENT

Built-in, weatherproof secondary containment eliminates the need for pans or basins.

UL142 APPROVED

The USA/ NA recognised standard for safety: steel above ground tanks for flammable and combustible liquids.

REMOVABLE INNER TANK

For routine cleaning, maintenance and inspection.

TWO WAY FORKLIFT POCKETS

Quick and easy maneuvering and mobility.



IDEAL USES AND APPLICATIONS

ONSITE FUEL SUPPLY

The FuelCube range is the ideal solution for short term on-site fuel storage.

FLEET REFUELING

The FuelCube can refuel your fleet and reduce any un-needed downtime in remote locations or on your site.

GENERATOR AND AUXILIARY EQUIPMENT

The FuelCube can connect to one diesel powered piece of equipment and dispense fuel by pump at the same time.

MODELS AND CAPABILITIES



SPECIFICATIONS

FCP250

FCP500

FCP1000

FCP1800

Capacity
(Nominal / safe fill -95%)

243 / 231 USG

528 / 502 USG

1,016 / 965 USG

1,862 / 1,769 USG





MAXIMIZE PRODUCTIVITY








No two fueling applications are identical, and every job site brings its own challenges. To help maximize your productivity we offer a wide range of accessories that can be paired with our tanks to create the ideal fuel and fluid solution for your specific needs. From dispensing equipment to placarding kits, and remote power solutions to trailer assemblies, we can tailor your tank to work as hard as you do.


SMALL TANK ACCESSORY GUIDE CONTENTS

ACCESSORY	PRODUCT
PUMPING AND DISPENSING 	Pump kit assemblies Filter kits Priming kits Emergency venting kits Suction hose kit upgrade Anti-syphon valves Dispensing nozzles Remote power kits
HOSES AND FITTINGS 	Fuel delivery hoses Feed/return hose kits and feed/return blocks Hose reels Hose swivels and quick coupler kits
GAUGES, METERING AND MANAGEMENT 	Metering Kits Tank gauges and leak detection Fuel management systems
SAFETY AND COMPLIANCE 	Placard kits Fire extinguisher and spill kits Emergency pump stop kits
TANK ACCESSORIES 	Trailer assemblies Accessory mounting bar and pedestal kits Custom branded decal kits Tank lining


SMALL TANK & ACCESSORY
QUICK REFERENCE

NORTH AMERICA

Product brand	TransCube Global							FuelCube				UL2085
Product image												
Model number	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG	FCP250	FCP500	FCP1000	FCP1800	PAT04
Brim fill capacity (USG/L)	132 / 499	251 / 949	552 / 2,091	787 / 2,980	1,056 / 4,000	1,242 / 4,700	2,388 / 9,040	243 / 921	528 / 2,000	1016 / 3,846	1,862 / 7,048	1,234 / 4,672
Safe fill capacity (USG/L)	125 / 474	238 / 902	525 / 1,986	748 / 2,831	1,003 / 3,800	1,180 / 4,465	2,269 / 8,588	231 / 875	502 / 1,900	965 / 3,654	1,769 / 6,696	1,030 / 3,900
Transportable (full of fuel) or stationary (move empty only)	Transportable						Stationary	Stationary				
Containment	110% bunded - double walled											
Approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30							UL142, CAN/ULC-S601				UL142, ULCS601, UL2085, ULSCS655, California CARB




















Pump and dispensing

Pump Kit Assemblies complete pump kit with hose, automatic nozzle, mounting bracket, & all fittings/hardware necessary									
Example Photo	Power	Flow rate	Hose Diameter Length	Brand	Basic Kit part number shown. Standard Kit: add -F & Deluxe Kit: add -D		Basic Kit part number shown. Standard Kit: add -F & Deluxe Kit: add -D		Only available in Basic Kit Add Meter & Filter Kits below as desired
 <div>BASIC Kit: Includes:pump kit w/ hose, automatic nozzle,mounting bracket, & all fittings/hardware</div> <div>STANDARD Kit: Same as Basic Kit, PLUSFilter Kit</div> <div>DELUXE Kit: Same as Standard Kit,PLUS hose swivel &inline digital meter</div>	115V	12GPM	3/4" 12'	GPI	M1115SAUK		M1115SAUK		M-1115S-AU + DTK.016-52.75
		15GPM	3/4" 12'	FILL RITE	FR610HAK		FR610HAK		FR610HA + DTK.020-52.75
		20GPM	1" 18'	FILL RITE	FR710VBK		FR710VBK		FR710VB + DTK.020-52.75
		20GPM	1" 18'	GPRO	PRO20-115ADK		PRO20-115ADK		PRO20-115AD + DTK.016-52.75
	120V	25GPM	1" 18'	FILL RITE	NX25-120NF-AAK		NX25-120NF-AAK		NX25-120NB-AA + DTK.020-52.75
	115/230V	35GPM	1" 18'	GPRO	PRO35-115ADK		PRO35-115ADK		PRO35-115AD + DTK.020-52.75
	12V	15GPM	3/4" 12'	GPI	M150SAUK		M150SAUK		M-150S-AU + DTK.016-52.75
			3/4" 12'	FILL RITE	FR1210HAK		FR1210HAK		FR1210HA + DTK.016-52.75
		20GPM	1" 12'	FILL RITE	FR4210HBK		FR4210HBK		FR4210HB + DTK.016-52.75
			1" 14'	GPI	G20-012ADK		G20-012ADK		G20-012AD + DTK.016-52.75
	12V or 24V	25GPM	1" 18'	GPI	V25-012ADK		V25-012ADK		V25-012AD + DTK.016-52.75
			1" 18'	FILL RITE	NX25-DDCNF-AAK		NX25-DDCNB-AA + DTK.016-52.75		
		24V	1" 18'	GPI	V25-024ADK		V25-024ADK		V25-024AD + DTK.016-52.87
	Manual	N/A	3/4" 12'	N/A	K1N		K1N		N/A
		N/A	1" 12'	N/A	K2N		K2N		

SMALL TANK & ACCESSORY
QUICK REFERENCE












NORTH AMERICA

Product brand	TransCube Global							FuelCube				UL2085
Product image												
Model number	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG	FCP250	FCP500	FCP1000	FCP1800	PAT04
Brim fill capacity (USG/L)	132 / 499	251 / 949	552 / 2,091	787 / 2,980	1056 / 4,000	1,242 / 4,700	2,388 / 9,040	243 / 921	528 / 2,000	1,016 / 3,846	1,862 / 7,048	1,234 / 4,672
Safe fill capacity (USG/L)	125 / 474	238 / 902	525 / 1,986	748 / 2,831	1003 / 3,800	1,180 / 4,465	2,269 / 8,588	231 / 875	502 / 1,900	965 / 3,654	1,769 / 6,696	1,030 / 3,900
Transportable (full of fuel) or stationary (move empty only)	Transportable						Stationary	Stationary				
Containment	110% bunded - double walled											
Approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30							UL142, CAN/ULC-S601				UL142, ULCS601, UL2085, ULSCS655, California CARB


Filter Kits Inline filter with necessary components to keep your fuel clean before dispensed into your equipment																	
Example photo	Type	Hose diameter	GPM range	Micron rating													
	Particulate & Water	3/4"	up to 25GPM	30	PWK.030-12							PWK.030-12		PWK.030-12			
		1"	up to 25GPM	30	PWK.030-16							PWK.030-16		PWK.030-16			
			up to 40GPM	30	PWK.030-16H							PWK.030-16H		PWK.030-16H			
Priming Kits Adapter kit to add to any deluxe or standard pump kit to allow the pump to prime the feed line in a feed/return set-up																	
Example photo	Quick Coupler Size & Type		Thread	QC material	NOTE: Requires Pump Kit						NOTE: Requires Pump Kit						
	1/2" ISOB		NPT	Steel	PAK.008						PAK.008			N/A			
	3/4" ISOB		NPT	Steel	PAK.012						PAK.012			N/A			
Emergency Venting Kits Includes the necessary Emergency vents for applications or jurisdictions requiring this venting in stationary Installations													Vent Incl. Standard				
Example photo	Fuel Type				Vent Extender Kits:												
	Gasoline & Diesel (only in certain applications where AHJ requires it to comply with station-ary tank regulations)				KIT-VENT-05TCG	KIT-VENT-10TCG	KIT-VENT-20TCG/30TCG			KIT-VENT-40TCG/50TCG	KIT-VENT-100TCG		KIT-VENT-FCP250	KIT-VENT-FCP500	KIT-VENT-FCP1000	KIT-VENT-FCP1800-48" or KIT-VENT-FCP1800-72"	N/A
Suction Hose Kit Upgrade Stainless Steel Flexible Suction Hose Upgrade for Pump Kits above for Jurisdictions that require a steel line on the suction side of Pump in Installations																	
	Size	Thread	Approvals														
N/A	1"	NPT	UL/ULC		UFPH-16-18-S4						UFPH-16-18-S4						N/A
Dispensing Nozzles Standard dispensing nozzles for dispensing fuel into equipment & machinery																	
Example photo	Size	Type	Approvals	Jacket color													
	3/4"	Auto Shut-off	None	Blue	110121-8 (unleaded straight spout)110121-8						110121-8 (unleaded straight spout)110121-8						110121-8
			UL/ULC	Green	N075DAU10 (diesel fuel only)						N075DAU10 (diesel fuel only)						N075DAU10
			UL/ULC	Red	N075UUAU10 (unleaded gasoline)						N075UUAU10 (unleaded gasoline)						N075UUAU10
	1"	Auto Shut-off	UL	Green	906008-570						906008-570						906008-570
			UL/ULC	Red	N100DAU13						N100DAU13						N100DAU13
		Manual	None	None	110155-4						110155-4						110155-4
Remote Power Kits Kits for powering 12v pumps in remote locations where there is limited or no power																	
Example photo	Type		Power	Wattage													
	Battery Power Kit w/ Solar Recharge		12V	50W													
				100W													
	Battery Power Kit		12V	N/A													
Battery Recharger		115V to 12V	N/A														

SMALL TANK & ACCESSORY
QUICK REFERENCE

NORTH AMERICA

Product brand	TransCube Global							FuelCube				UL2085
Product image												
Model number	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG	FCP250	FCP500	FCP1000	FCP1800	PAT04
Brim fill capacity (USG/L)	132 / 499	251 / 949	552 / 2,091	787 / 2,980	1,056 / 4,000	1,242 / 4,700	2,388 / 9,040	243 / 921	528 / 2,000	1016 / 3846	1,862 / 7,048	1,234 / 4,672
Safe fill capacity (USG/L)	125 / 474	238 / 902	525 / 1,986	748 / 2,831	1,003 / 3,800	1,180 / 4,465	2,269 / 8,588	231 / 875	502 / 1,900	965 / 3654	1,769 / 6,696	1,030 / 3,900
Transportable (full of fuel) or stationary (move empty only)	Transportable						Stationary	Stationary				
Containment	110% bunded - double walled											
Approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30							UL142, CAN/ULC-S601				UL142, ULCS601, UL2085, ULSCS655, California CARB

Fuel Delivery Hoses | High-Quality hoses to increase the reach of your fuel delivery hose












Example photo	Type	Hose diameter	Length (ft)	Grade			
	Standard Fuel Delivery Hose Kits	3/4"	12'	Soft-walled	SW.1212-MM		SW.1212-MM
			15'	Arctic	AH.1215-MMS		AH.1215-MMS
			18'	Soft-walled	SW.1218-MMS		SW.1218-MMS
			25'	Soft-walled	SW.1225-MMS		SW.1225-MMS
			50'	Arctic	AH.1225-MMS		AH.1225-MMS
				Soft-Walled	SW.1250-MMS		SW.1250-MMS
				Arctic	AH.1250-MMS		AH.1250-MMS
				Marine	MG.1250-MM		MG.1250-MM
		1"	12'	Soft-Walled	SW.1612-MM		SW.1612-MM
			15'	Arctic	AH.1615-MMS		AH.1615-MMS
			18'	Soft-walled	SW.1618-MMS		SW.1618-MMS
			25'	Soft-walled	SW.1625-MMS		SW.1625-MMS
			50'	Arctic	AH.1625-MMS		AH.1625-MMS
				Soft-Walled	SW.1650-MMS		SW.1650-MMS
				Arctic	AH.1650-MMS		AH.1650-MMS
				Marine	MG.1650-MM		MG.1650-MM
	UL/Ulc Hose Assemblies	3/4"	12'	Soft Wall	700F3135		700F3135
		1"	12'	Soft Wall	300F7773		300F7773

Feed/Return Hose Kits & Feed/Return Blocks | High-Quality hoses including quick couplers for Feed & Return applications






Example photo	Type	Hose diameter	Length (ft)	Thread type			
	Feed/Rtn Hose Kits	1/2"	15'	NPT	FR0815KT		FR0815KT
			25'	NPT	FR0825KT		FR0825KT
			50'	NPT	FR0850KT		FR0850KT
		3/4"	25'	NPT	FR1225KT		FR1225KT
			50'	NPT	FR1250KT		FR1250KT

SMALL TANK & ACCESSORY
QUICK REFERENCE

NORTH AMERICA













Product brand	TransCube Global							FuelCube				UL2085
Product image												
Model number	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG	FCP250	FCP500	FCP1000	FCP1800	PAT04
Brim fill capacity (USG/L)	132 / 499	251 / 949	552 / 2,091	787 / 2,980	1,056 / 4,000	1,242 / 4,700	2,388 / 9,040	243 / 921	528 / 2,000	1,016 / 3,846	1,862 / 7,048	1,234 / 4,672
Safe fill capacity (USG/L)	125 / 474	238 / 902	525 / 1,986	748 / 2,831	1,003 / 3,800	1,180 / 4,465	2,269 / 8,588	231 / 875	502 / 1,900	965 / 3,654	1,769 / 6,696	1,030 / 3,900
Transportable (full of fuel) or stationary (move empty only)	Transportable						Stationary	Stationary				
Containment	110% bunded - double walled											
Approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30							UL142, CAN/ULC-S601				UL142, ULCS601, UL2085, ULSCS655, California CARB













Feed/Return Hose Kits & Feed/Return Blocks High-Quality hoses including quick couplers for Feed & Return applications											
Example photo	Type	Hose diameter	Length (ft)	Thread type	NOTE: Tank comes with one Feed & Return Block set as standard				NOTE: Tank requires F&R Block kit for F&R hosesz		
	Feed/Rtn Hose Kits	1/2"	N/A	NPT	RN08K				Included w/ tank: 2x Feed & 2x Returns	RN08K	RN08K
		3/4"	N/A	NPT	RN12K					RN12K	RN12K
		1"	N/A	NPT	RN16K					RN16K	RN16K
		1.5"	N/A	NPT	RN24K					RN24K	RN24K
	Return Block Only	1/2"	N/A	NPT	RN08					RN08	RN08
		3/4"	N/A	NPT	RN12					RN12	RN12
		1"	N/A	NPT	RN16					RN16	RN16
		1.5"	N/A	NPT	RN24					RN24	RN24
Hose Reels Includes the hose at the diameter & length specified, for your hard to reach applications											
Example photo	Type	Hose Dia. & Type	Length (ft)	Brand	NOTE: Tank requires accessory mounting bar kit				NOTE: Tank requires accessory mounting bar kit		
	Spring Loaded	3/4" or 1" Bare Reel	Up to 25'	Western	WG-BHR-SR12+1625				WG-BHR-SR12+1625		WG-BHR-SR12+1625
			Up to 50'	Western	WG-BHR-SR12+1650				WG-BHR-SR12+1650		WG-BHR-SR12+1650
		1" Bare Reel	Up to 50'	Reelcraft	FSD14005 OLP				FSD14005 OLP		FSD14005 OLP
			Hose Reel w/3/4" Soft-Walled Hose	25'	Western	WG-HRK-SR1225-SW				WG-HRK-SR1225-SW	
		25'		Hannay	N/A				N/A		N/A
		50'		Western	WG-HRK-SR1250-SW				WG-HRK-SR1250-SW		WG-HRK-SR1250-SW
		Hose Reel w/ 1" Soft-Walled Hose	25'	Western	WG-HRK-SR1625-SW				WG-HRK-SR1625-SW		WG-HRK-SR1625-SW
			25'	Hannay	N/A				N/A		N/A
			50'	Western	WG-HRK-SR1650-SW				WG-HRK-SR1650-SW		WG-HRK-SR1650-SW
			50'	Reelcraft	FSD14050 OLP				FSD14050 OLP		FSD14050 OLP
Hose Swivels & Quick Coupler Kits High-Quality swivels ideal for increasing hose flexibility & maneuverability in tight areas; Quick Couplers include the male & female couplers & are ideal for applications which require quick disconnecting of fuel lines.											
Example photo	Type	Hose diameter	Thread type	Material/type							
	Multi Plane	3/4"	NPT	Steel	S075H1314				S075H1314		S075H1314
		1"	NPT	Steel	S100H1315				S100H1315		S100H1315
	QC's Male & Female Set	1/2"	NPT	Steel/ISOB	QCS8				QCS8		QCS8
		3/4"	NPT	Steel/ISOB	QCS12				QCS12		QCS12
		1"	NPT	Steel/ISOB	QCS16				QCS16		QCS16

SMALL TANK & ACCESSORY
QUICK REFERENCE













NORTH AMERICA






Product brand	TransCube Global							FuelCube				UL2085
Product image												
Model number	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG	FCP250	FCP500	FCP1000	FCP1800	PAT04
Brim fill capacity (USG/L)	132 / 499	251 / 949	552 / 2,091	787 / 2,980	1,056 / 4,000	1,242 / 4,700	2,388 / 9,040	243 / 921	528 / 2,000	1,016 / 3,846	1,862 / 7,048	1,234 / 4,672
Safe fill capacity (USG/L)	125 / 474	238 / 902	525 / 1,986	748 / 2,831	1,003 / 3,800	1,180 / 4,465	2,269 / 8,588	231 / 875	502 / 1,900	965 / 3,654	1,769 / 6,696	1,030 / 3,900
Transportable (full of fuel) or stationary (move empty only)	Transportable						Stationary	Stationary				
Containment	110% bunded - double walled											
Approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30						UL142, CAN/ULC-S601					UL142, ULCS601, UL2085, ULSCS655, California CARB

 Gauges, Metering & Mgmt	Meter Kits In-line meters for keeping track of dispensing amount into your equipment													
	Example photo	Type	Hose diameter	Display	Brand									
		Mechanical	3/4"	Gallons	Fill Rite	807C				807C		807C		
				Litres	Fill Rite	807CL				807CL		807CL		
			1"	Gallons	Fill Rite	901C				901C		901C		
				Litres	Fill Rite	901CL				901CL		901CL		
		Digital	3/4" or 1"	Gallons/Litres	Fill Rite	TT10AN				TT10AN		TT10AN		
				Gallons	GPI	113255-1				113255-1		113255-1		
				Litres	GPI	113255-2				113255-2		113255-2		
	Digital w/ Pulse Output	1"	Gallons/Litres	Fill Rite	900CDP (Pulse Output)				900CDP (Pulse Output)		900CDP (Pulse Output)			
Tank Gauges & Leak Detection Ideal for showing a visual gauge of tank fluid level, or notifying if a leak is detected in the containment area.														
Example photo	Type	Application		Brand	Gauge included as standard equipment on tank									
	Gauge	Float Gauge for level indication		Rochester	23.033	23.032		23.027	23.032	N/A	8680-01343	8680-01025	WG-SGK	
		String Gauge for level indication		N/A	N/A				16540	N/A		N/A		
		Wired Remote Fuel Gauge Kit for Rochester Gauges		WG-WRFGK				N/A	WG-WRFGK		N/A			
	N/A	Containment Leak Detection Kit			N/A	WG-CLDK	N/A				N/A	N/A		
Fuel Management Systems Includes the necessary components to add fuel management to your tanks for monitoring & managing your fuel usage														
Example photos	Types available		Preferred Partners											
	We offer several systems from our preferred partners ranging from Cloud-based App controlled, to Hardware-based keypad/fob controlled.		  		Range of Fuel Management System Packages Available. Please contact our technical sales team for further details & quotes on specific packages that best meet your application: techsupport.na@western-global.com									
 Safety and compliance	Placard Kits Includes the necessary hazardous labelling for the tanks to ensure that you are compliant for storing & transporting fuel													
	Example photo	Type	Placard Qty	4 Digit UN #'s included										
		Flippable Placard	2 Sets	1993 (2 types) & 1203		FPK.002-3				N/A		FPK.002-3	N/A	N/A
				1202 & 1203		FPK.002-2				N/A		FPK.002-2	N/A	N/A
			4 Sets	1993 (2 types) & 1203		N/A				FPK.004-3		N/A	FPK.004-3	FPK.004-3
				1202 & 1203		N/A				FPK.004-2		N/A	FPK.004-2	FPK.004-2
	Stickers	Set of 4	1993 (2 types) & 1203		PSK.004-3						PSK.004-3		PSK.004-3	
			1202		TC0211						TC0211		TC0211	

SMALL TANK & ACCESSORY
QUICK REFERENCE



NORTH AMERICA

Product brand	TransCube Global							FuelCube				UL2085
Product image												
Model number	05TCG	10TCG	20TCG	30TCG	40TCG	50TCG	100TCG	FCP250	FCP500	FCP1000	FCP1800	PAT04
Brim fill capacity (USG/L)	132 / 499	251 / 949	552 / 2,091	787 / 2,980	1,056 / 4,000	1,242 / 4,700	2,388 / 9,040	243 / 921	528 / 2,000	1,016 / 3,846	1,862 / 7,048	1,234 / 4,672
Safe fill capacity (USG/L)	125 / 474	238 / 902	525 / 1,986	748 / 2,831	1,003 / 3,800	1,180 / 4,465	2,269 / 8,588	231 / 875	502 / 1,900	965 / 3,654	1,769 / 6,696	1,030 / 3,900
Transportable (full of fuel) or stationary (move empty only)	Transportable						Stationary		Stationary			
Containment	110% bunded - double walled											
Approvals	UL142, CAN/ULC-S601, US DOT, UN-IBC, TRANSPORT CANADA, NFPA30							UL142, CAN/ULC-S601				UL142, ULCS601, UL2085, ULSCS655, California CARB

<div><div>!</div><div>Safety and compliance</div></div>	Fire Extinguisher & Spill Kits Includes the necessary components to mount to the tanks																	
	Example photo	Kit	Type	Size														
		Fire Extinguisher	ABC	20 lb	TT-20ABC					TT-20ABC					TT-20ABC		TT-20ABC	
		Fire Extinguisher Bracket - CAN	ABC	20 lb	TT-20HDTB					TT-20HDTB					TT-20HDTB		TT-20HDTB	
		Fire Extinguisher Bracket - USA	ABC	10 lb	TT-20ABC Bracket					TT-20ABC Bracket					TT-20ABC Bracket		TT-20ABC Bracket	
Universal Spill Kit		N/A	15 Gallon	TT-15GALUS					TT-15GALUS					TT-15GALUS		TT-15GALUS		
Emergency Pump Stop Kits Ships loose for installation at the site by a qualified electrician																		
Example photo	Type	Approvals																
N/A	Double Pole, normally open	UL Listed		ES1-DP-NO					ES1-DP-NO					ES1-DP-NO		ES1-DP-NO		
<div><div></div><div>Tank Accessories</div></div>	Trailer Assemblies & Accessories Include Heavy-duty trailer assemblies designed specifically for the transportation of fuel tanks and compliant with the necessary DOT regulations																	
	Example Photo	Brake type	Finish	Hitch type														
		Electric	Galvanised	2 5/16" Ball	10UCA-EB	10UCA-EB	20UCA-EB	30UCA-EB	N/A		N/A					N/A		
		Surge		2 5/16" Ball	10UCA-SB*	10UCA-SB*	20UCA-SB*	30UCA-SB*	N/A									
		Electric		Pintle	N/A													
	Trailer Accessories		Pintle	PH-1000-UCA				Incl.		N/A								
			2 5/16" Ball	Incl.				UCA-BH-001										
		Optional Spare Tire Mount Bracket for Trailers			UCA-STM-001		UCA-STM-001	UCA-STM-002	UCA-STM-003									
		Replacement Tire for Trailers			UCA-STR-004		UCA-STR-001	UCA-STR-002	UCA-STR-003									
	Accessory Mounting Bar & Pedestal Kits Heavy-Duty galvanized construction for mounting the necessary accessories on select tanks																	
	Example photo	Type	Finish															
		Accessory Bars	Galvanized	ABK.045T		ABK.045	ABK.060	ABK.086 or ABK.090	ABK.090	ABK.100	ABK.045		ABK.086 or ABK.090	ABK.086	ABK.086			
		Pedestal Mount		N/A								PMK.100	N/A		N/A			
	Custom Branded Decal Kits* Includes two decals per kit, up to three colors, using customer supplied logo artwork																	
	Example photo	Type		Size	Decal Qty													
		Vinyl, white background		12"H x 36"L	2	N/A	CUSTOM-SDK.002*				CUSTOM-SDK.002*				CUSTOM-SDK.002*		CUSTOM-SDK.002*	
		Vinyl, die-cut		12"H x 36"L	2	N/A	CUSTOM-DDK.002*				CUSTOM-DDK.002*				CUSTOM-DDK.002*		CUSTOM-DDK.002*	
	Tank Lining* High-quality epoxy lining for speciality fuels and applications																	
	Example photo	For use with	Type															
	Specialty Fuels	DEVCHEM-253 Epoxy lining		EX LINE-05TCG*	EX LINE-10TCG*	EX LINE-20TCG*	EX LINE-30TCG*	EX LINE-40TCG*	EX LINE-50TCG*	EX LINE-100TCG*	N/A		N/A		N/A			

BUILD YOUR TANK WORKSHEET

Use the space below to keep track of your tanks and accessories. Write your tank model numbers and the corresponding accessory part numbers in the spaces below. Refer to this sheet for quick re-ordering or maintenance questions.

		TANK 1	TANK 2
TANK MODEL #			
<div>Pumping and metering</div> <div></div>	PUMP KIT ASSEMBLY		
	FILTER KITS		
	PRIMING KITS		
	EMERGENCY VENTING KITS		
	SUCTION HOSE KIT UPGRADE		
	ANTI-SYPHON VALVES		
	DISPENSING NOZZLES		
	REMOTE POWER KITS		
<div>Hoses and fittings</div> <div></div>	FUEL DELIVERY HOSES		
	FEED/RETURN HOSE KITS & BLOCKS		
	HOSE REELS		
	HOSE SWIVELS & QUICK COUPLER KITS		
<div>Gauges, metering and management</div> <div></div>	METERING KITS		
	TANK GAUGES		
	FUEL MANAGEMENT SYSTEMS		
<div>Safety and compliance</div> <div></div>	PLACARD KITS		
	FIRE EXTINGUISHER & SPILL KITS		
	EMERGENCY PUMP STOP KIT		
<div>Tank accessories</div> <div></div>	TRAILER ASSEMBLIES		
	ACCESSORY MOUNTING BAR AND PEDESTAL KITS		
	TANK LINING		

NOTES



ENVIROCUBE GLOBAL 3,014 - 13,703 US GALLONS

The EnviroCube Global offers you versatility for stationary fueling applications. The EnviroCube Global is a cost effective yard tank, ideal for fuel distributors and their customers, including fleet operators.



FEATURES

ACCESS MANWAY
Allows easy inspection of inner tank and simplifies routine maintenance.

LIFTING EYES
Allows tank to be moved by crane when empty.

DOUBLE WALLED
Built in, weatherproof secondary containment eliminates the need for pans or basins.

PUMP PACKAGES
Compatible with Western Global standard dispensing pump packages and accessories.

FORKLIFT POCKETS
Quick and easy maneuvering and mobility (while empty).

CUSTOM SOLUTIONS
Spare parts available for customised set up, including multiple feed/return, gauging, and submersible pump installation.

OVERFILL PROTECTION
Fitted with UL listed overfill protection device.

IDEAL USES AND APPLICATIONS

- ON-SITE FUEL SUPPLY**
Keep fuel strategically located on-site to refuel construction machinery without having to wait for fuel deliveries.
- FILL MORE EFFICIENTLY**
The EnviroCube's multiple ports allow you to fuel up to three pieces of equipment simultaneously.
- BULK FUEL STORAGE**
Stationary bulk fuel storage provides a backup supply of fuel and helps control costs; buy in bulk when prices are low and watch savings add up.
- FLEET REFUELING**
In remote locations or on your facility, the EnviroCube can be fitted with all the necessary equipment to refuel your fleet safely and efficiently, reducing downtime.

MODELS AND CAPABILITIES

	E3000	E6000	E12000
SPECIFICATIONS			
Capacity (Nominal/ Safe fill)	3,014/ 2,742 US Gallons	6,390/ 5,815 US Gallons	13,703/ 12,000 US Gallons



TRANSTANK GLOBAL 2,510 - 5,614 US GALLONS

The TransTank Global is a fully transportable, 110% self-bunded (double wall) fuel storage container that was designed for bulk fuel transfer and emergency fuel supply. Built to ISO container dimensions, the TransTank Global allows for simplified shipping by road, rail or sea.



FEATURES

EQUIPMENT CABINET

Lockable equipment cabinet that secures all ports and fittings, as well as captures all spills and drips. Secure hose access enables fueling while cabinet is locked.

ACCESS HATCH

Easy access to inner tank for routine maintenance and cleaning.

110% BUNDED

Built-in, weather proof bund.

CYLINDRICAL INNER TANK

Cylindrical inner tank to comply with transport regulations.

ISO CONTAINER DIMENSIONS

Built to ISO container dimensions to allow simplified shipping by road, rail, or sea.

SECURE HOSE ACCESS

Letterbox-style ports to enable continuous fueling while cabinet is locked.



STACKABLE

Container design allows stacking up to six high when full, reducing your storage space required.

FORKLIFT POCKETS

Forklift pockets for easy movement when empty.

TWIST LOCKS

Corner twist locks for ease of handling and transport.

IDEAL USES AND APPLICATIONS

COMPLETE FUELING STATION

For fleet refueling or the sale of fuel, tanks can be fitted to become complete fuel dispensing and management systems.

GENERATOR AND AUXILIARY EQUIPMENT

Able to connect to one diesel powered piece of equipment and dispense fuel by pump at the same time.

BULK FUEL TRANSPORT & SUPPLY

The TransTank Global is easily transportable to provide front line fuel supply

MODELS AND CAPABILITIES



SPECIFICATIONS	100TT-IMDG	200TTCAB-IMDG	200TT-IMDG
Capacity (Nominal / safe fill (95%))	2,510/ 2,384 USG	4,887/ 4,643 USG	5,614/ 5,333 USG



TRANSTANK PRO 3,223 - 18,175 US Gallons

The TransTank Pro series is a self-contained bulk fuel container that offers an efficient and environmentally friendly solution for heavy-duty, on-demand fuel supply applications. This series is specifically designed to bolt together easily, providing a cost effective bulk fuel facility.



FEATURES

EFFORTLESS CONNECTING

Tanks can be linked together for unlimited storage capacity. Perfect for power projects and mining operations.



ACCESS MANWAY

Manway covers on top of the tank allow for access to inner tank for easy routine maintenance and inspection.

STACKABLE

Tanks can be stacked, reducing storage space requirements (while empty).

DOUBLE-WALLED

Built-in, weather proof secondary containment, eliminates the need for berms or basins.

EASY EXTRACTION

The sloping floor design forces excess water to the front of the tank where it can be effortlessly extracted.

PUMP BAY

Lockable pump bay that secures all ports and fittings, as well as captures all spills and drips (on standard models only).

ISO CONTAINER DIMENSIONS

Built to ISO container dimensions, allowing the tank to be easily shipped when empty.

UNDER TANK VISIBILITY

Containers can be easily inspected without the hassle of lifting the tank.



IDEAL USES AND APPLICATIONS

ON-SITE REFUELING

For fleet refueling or the sale of fuel, tanks can be fitted to become complete fuel dispensing and management systems.

MINING

The TransTank Pro offers an efficient solution for large, on-demand fuel supply needs for generators and mining equipment.

FUEL FARMS

With their modular design, the TransTank Pro series can be linked together easily to provide unlimited storage capacity.

POWER GENERATION

Well-suited for the continuous operation of large generators and international power projects.

MODELS AND CAPABILITIES



SPECIFICATIONS

P12

P31

P69

Capacity
(Nominal)

3,223 USG

8,189 USG

18,175 USG



UL2085 - PROTECTED ABOVE GROUND TANK 1,222 - 2,822 US GALLONS

Western Global's 2 hr Fire rated, Protected Aboveground Tank is a thermally insulated double wall tank approved to Underwriters Laboratory UL2085 standard. UL 2085 tanks are internationally recognized for the safe storage of flammable and combustible liquids.

Our unique lightweight insulation method limits the heat transferred to the primary fuel during a fire and protects the tank from physical damage.



FEATURES

RELOCATABLE
All sizes fit inside shipping containers for ease of transport to any site globally.

STORE FLAMMABLE LIQUIDS
2 Hour Fire Rated Tank, suitable for flammable liquids in most jurisdictions including Gasoline.

COMPLIANT
UL2085 listed and complies with the requirements of NFPA30

DOUBLE-WALL
Environmentally safe steel, double-wall construction.

ACCESSORIES
Mounting rails for easy connection of accessories and pump packages to the tank.



ROBUST DESIGN
Tank has been vehicle impact tested and projectile tested

2HR FIRE RATED
Proprietary lightweight insulation system provides fire protection for your fuel storage

IDEAL USES AND APPLICATIONS

HOME BASE REFUELING
Suitable for home base or depot fleet refueling where majority of vehicles run on gasoline or building codes require a protected tank.


POWER GENERATION
Suitable for permanent install with back up diesel generators where building codes require a protected above ground tank such as basement install or without setback to existing structures.

MODELS AND CAPABILITIES



SPECIFICATIONS	PAT04	PAT10
Capacity (Nominal)	1,222 USG	2,822 USG



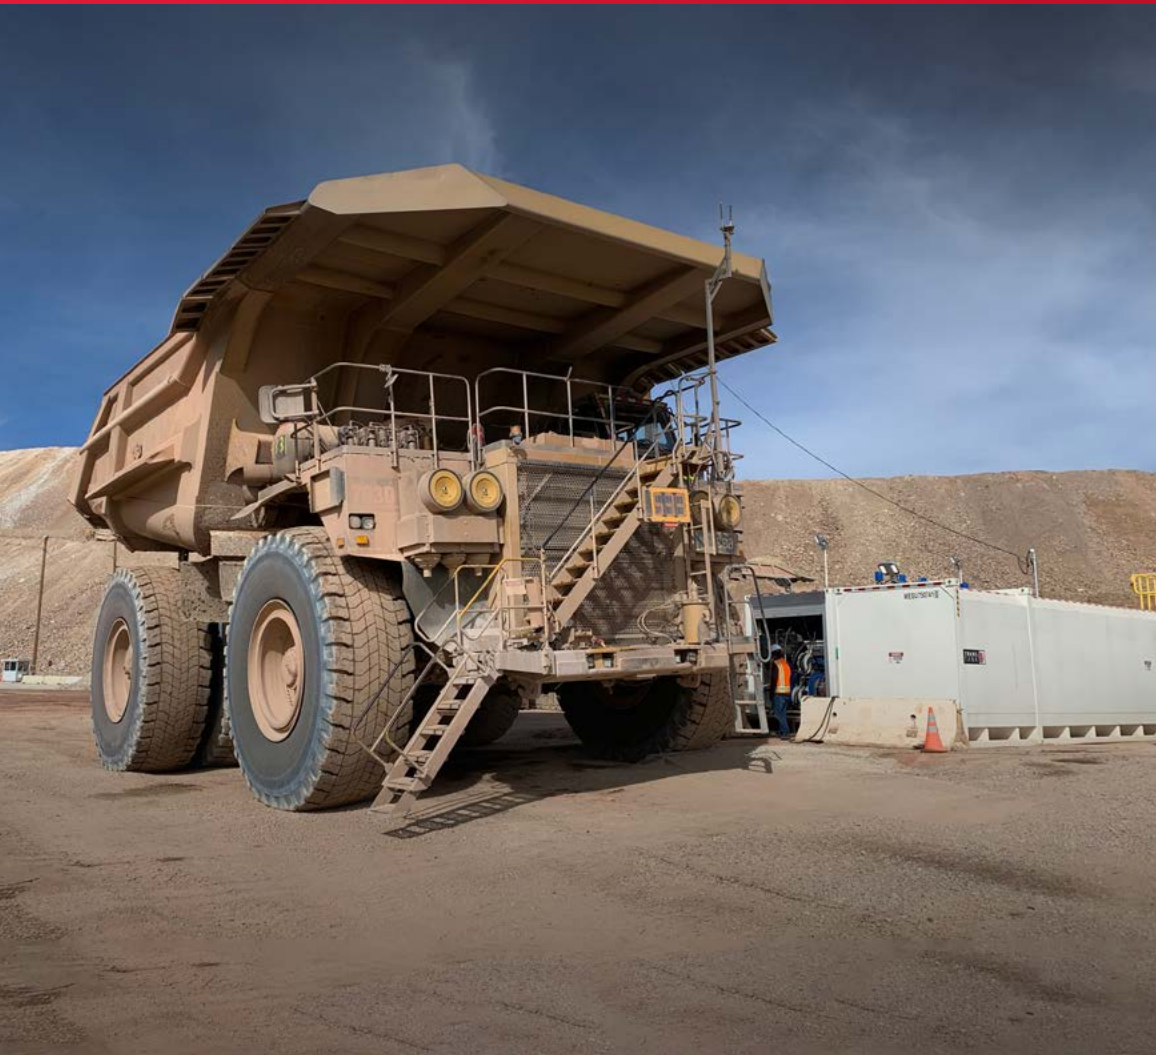





MAXIMIZE PRODUCTIVITY








No two fueling applications are identical, and every job site brings its own challenges. To help maximize your productivity we offer a wide range of accessories that can be paired with our tanks to create the ideal fuel and fluid solution for your specific needs. From dispensing equipment to placarding kits, and remote power solutions to trailer assemblies, we can tailor your tank to work as hard as you do.

LARGE TANK ACCESSORY GUIDE CONTENTS

ACCESSORY	PRODUCT
PUMPING AND DISPENSING FILLING AND SUCTION 	Pump kit assemblies Electrical panel kits Portable pump carts Feed and return line assemblies Remote Fill box assemblies
GAUGES, METERING AND MANAGEMENT 	Tank gauge assemblies Tank alarm assemblies Fuel management systems
SAFETY AND COMPLIANCE 	Fall arrest cage assemblies Ladder and platform assemblies Sill kits Fire extinguishers
TANK ACCESSORIES 	Skid assemblies Roller shutter door upgrade kits Custom branded decal kits

LARGE TANK & ACCESSORY
QUICK REFERENCE








NORTH AMERICA

Product brand	EnviroCube Global			Pro Series			UL2085
Product image							
Model number	E3000	E6000	E12000	P12	P31	P69	PAT10
Brim fill capacity (USG/L)	3,014 / 11,410	6,390 / 24,190	11,990 / 45,387	3,223 / 12,200	8,189 / 31,000	18,175 / 68,800	2,822 / 10,682
Safe fill capacity (USG/L)	2,742 / 10,379	5,815 / 22,013	11,390 / 43,115	3,068 / 11,614	7,846 / 29,700	17,356 / 65,700	2,562 / 9,698
Stationary (move empty only)	Stationary						
Containment	110% Bunded - double walled						
Approvals	UL/ULC, NFPA, UN DOT, TRANSPORT CANADA, PPG2					UL/ULC,NFPA, UL2085	

Standard-Duty Tank Mounted Suction Pump Dispensing Kits Basic Suction Pump Assemblies with Piping Kit & Optional Hose Reel										
Example photo	Application	Flow rate	Power source	Meter type	Filtration	Hose reel	Hose Dia. & Length	**Includes Connection Kit Assembly**		
	Standard-Duty: GPRO Regular Flow Pump Dispense Kit with Suction Piping Kit, 1" Hose & Auto Nozzle	35 GPM	115/230VAC	Analog [-C =Litres, -U =Gallons]	30 Micron Particulate & Water	N/A	1" x 18' soft-walled	WG-E-SDK-100-GPRO-U or WG-E-SDK-100-GPRO-C**	WG-P-SDK-100-GPRO-U or WG-P-SDK-100-GPRO-C**	WG-PAT-SDK-100-GPRO-U or WG-PAT-SDK-100-GPRO-C**
	Standard-Duty: Fill-Rite Regular Flow Pump Dispense Kit with Suction Piping Kit, 1" Hose & Auto Nozzle	35 GPM	115/230VAC	Analog [-C =Litres, -U =Gallons]	30 Micron Particulate & Water	N/A	1" x 18' soft-walled	WG-E-SDK-100-FR-U or WG-E-SDK-100-FR-C**	WG-P-SDK-100-FR-U or WG-P-SDK-100-FR-C**	WG-PAT-SDK-100-FR-U or WG-PAT-SDK-100-FR-C **
Heavy-Duty Tank Mounted Suction Pump Dispensing Kits Turn Key Suction Pump Assemblies with Suction Piping Kit										
Example photo	Application	Flow rate	Power source	Meter type	Filtration	Hose reel	Hose Dia. & Length	**Includes Connection Kit Assembly**		
	Heavy-Duty Basic Spec: Regular Flow Dispense Kit with Suction Piping Kit, 3/4" Delivery	20-25 GPM	230VAC/1P/60Hz(L1+L2+N)	Fill Rite 900CD Digital Meter with Pulser	30 Micron Particulate	ReelCraft 14500 Series Spring Rewind	3/4" x 50' soft-walled	WG-ET-FDB-075-A-101	WG-SD-FDB-075-A-101	WG-PT-FDB-075-A-101
	Heavy-Duty Basic Spec: Regular Flow Dispense Kit with Suction Piping Kit, 1" Delivery						1" x 50' soft-walled	WG-ET-FDB-A-101	WG-SD-FDB-A-101	WG-PT-FDB-A-101
	Heavy-Duty Standard Spec: High-Flow Dispense with Suction Piping Kit, 1.5" Delivery	40-50 GPM	230VAC/3P/60HzY+N	Tuthill Trade Legal, mechanical odometer -with Register and Mech Printer[-C =Litres, -U =Gallons]	Cimtek Twin Head High Flow 30 Micron Particulate with DP Gauge	Spring Rewind	1.5" x 50' soft-walled	WG-ET-FDS-A-101-U or WG-ET-FDS-A-101-C**	WG-SD-FDS-A-101-U or WG-SD-FDS-A-101-C**	WG-PT-FDS-A-101-U or WG-PT-FDS-A-101-C**
Heavy-Duty Tank Mounted Submersible Pressure Pump Dispensing Kits Turn Key Suction Pump Assemblies with Suction Piping Kit										
Example photo	Application	Flow rate	Power source	Meter type	Filtration	Hose reel	Hose Dia. & Length	**Includes Connection Kit Assembly**		
	BASIC SPEC SUBMERSIBLE PUMP KIT: with discharge Piping Kit to Tank head, Filter, 20' Hose, Meter, Nozzle Etc	(1/3HP) 18-20 GPM	230VAC/1P/60Hz (L1+L2+N)	Fill Rite 900CD Digital Meter with Pulser	Cimtek 30 Micron Particulate with DP Gauge	N/A	3/4" x 20' soft-walled	WG-E-SPKB-075	WG-P-SPKB-075	WG-EPT-SPKB-075
		(3/4HP) 25-30 GPM		Fill Rite 900CD1.5 Digital Meter with Pulser	Cimtek Twin Head High Flow 30 Micron Particulate with DP Gauge		1" x 20' soft-walled	WG-E-SPKB-100	WG-P-SPKB-100	WG-EPT-SPKB-100
		(2HP) 40+ GPM		Fill Rite 900CD1.5 Digital Meter with Pulser	Cimtek Twin Head High Flow 30 Micron Particulate with DP Gauge		1 1/2" x 20' soft-walled	WG-E-SPKB-150	WG-P-SPKB-150	WG-EPT-SPKB-150
	STANDARD SPEC SUBMERSIBLE PUMP KIT: with discharge Piping Kit to Tank head, Filter, Hose on 50' Reel, Meter, Nozzle Etc	(1/3HP) 18-20 GPM	230VAC/1P/60Hz (L1+L2+N)	Fill Rite 900CD Digital Meter with Pulser	Cimtek 30 Micron Particulate with DP Gauge	ReelCraft 14500 Series Spring Rewind	3/4" x 50' soft-walled	WG-E-SPKS-075	WG-P-SPKS-075	WG-EPT-SPKS-075
		(3/4HP) 25-30 GPM		Fill Rite 900CD Digital Meter with Pulser	Cimtek 30 Micron Particulate with DP Gauge	ReelCraft 14500 Series Spring Rewind	1" x 50' soft-walled	WG-E-SPKS-100	WG-P-SPKS-100	WG-EPT-SPKS-100
		(2HP) 40+ GPM		Fill Rite 900CD1.5 Digital Meter with Pulser	Cimtek Twin Head High Flow 30 Micron Particulate with DP Gauge	Hannay 922-30-31A Spring Rewind Reel 1 1/2" x 50' Capacity with Rollers	1 1/2" x 50' soft-walled	WG-E-SPKS-150	WG-P-SPKS-150	WG-EPT-SPKS-150








LARGE TANK & ACCESSORY
QUICK REFERENCE

NORTH AMERICA

Product brand	EnviroCube Global			Pro Series			UL2085
Product image							
Model number	E3000	E6000	E12000	P12	P31	P69	PAT10
Brim fill capacity (USG/L)	3,014 / 11,410	6,390 / 24,190	11,990 / 45,387	3,223 / 12,200	8,189 / 31,000	18,175 / 68,800	2,822 / 10,682
Safe fill capacity (USG/L)	2,742 / 10,379	5,815 / 22,013	11,390 / 43,115	3,068 / 11,614	7,846 / 29,700	17,356 / 65,700	2,562 / 9,698
Stationary (move empty only)	Stationary						
Containment	110% Bunded - double walled						
Approvals	UL/ULC, NFPA, UN DOT, TRANSPORT CANADA, PPG2					UL/ULC,NFPA, UL2085	




</

NORTH AMERICA

Product brand	EnviroCube Global			Pro Series			UL2085
Product image							
Model number	E3000	E6000	E12000	P12	P31	P69	PAT10
Brim fill capacity (USG/L)	3,014 / 11,410	6,390 / 24,190	11,990 / 45,387	3,223 / 12,200	8,189 / 31,000	18,175 / 68,800	2,822 / 10,682
Safe fill capacity (USG/L)	2,742 / 10,379	5,815 / 22,013	11,390 / 43,115	3,068 / 11,614	7,846 / 29,700	17,356 / 65,700	2,562 / 9,698
Stationary (move empty only)	Stationary						
Containment	110% Bunded - double walled						
Approvals	UL/ULC, NFPA, UN DOT, TRANSPORT CANADA, PPG2						UL/ULC,NFPA, UL2085



















Pumping and dispensing

Accessories for Standard-Duty Pump Kits Designed for enhancing the Standard-Duty Pump Kits with Additional Features										
Example photo	Description	Hose Dia. & Type	Hose Length	Dispensing Nozzle	Mounting Bracket					
	Hose Reel Kit	1” Soft-Walled	25’	N/A	Included		HRK.SDK-SR1625-SW			
			50’				HRK.SDK-SR1650-SW			
	Hose Reel & Dispensing Nozzle Kit	3/4” Soft-Walled	25’	HRK.SDK-SR1225-SW						
			50’	HRK.SDK-SR1250-SW						
	Hose & Dispensing Nozzle Kit	3/4” Soft-Walled	18’	N/A	HDK.SDK-1218-SW					
Portable Pump Dispensing Assemblies Turn Key Portable Pump kits on Carts for Quickly Connecting to Tanks & Dispensing or Transferring Fuel										
Example Photo	Application	Flow rate	Power Source	Meter Type	Hose Reel	Hose Dia. & Length				
	Fuel Transfer	30-40 GPM	120VAC/60Hz	Trade Legal, mechanical odometer [-C =Litres, -U =Gallons]	N/A	1.5" x 10'	02-M1562-GII-M-U or 02-M1562-GII-M-C		02-M1562-GII-M-U or 02-M1562-GII-M-C	02-M1562-GII-M-U or 02-M1562-GII-M-C
				Non Metered			02-M1562-GII		02-M1562-GII	02-M1562-GII
Tank Evacuation SUCTION HOSE ASSY Kits for Use with the Above Carts							WG-E-S-PC-D		WG-P-S-PC-D	WG-EPT-S-PC-D
Feed & Return Line Assemblies For Gen feed Includes 1” Piping For Both Feed & Return Lines, Anti-Syphon on Feed, Ball Valving in cabinet.										
Example photo	Description									
	Feed & Return Line Assemblies For Gen feed Includes 1” Piping For Both Feed & Return Lines, Anti-Syphon on Feed, Valving to cabinet.									
							101048-ET		101048-PT	101048-EPT

LARGE TANK & ACCESSORY
QUICK REFERENCE








NORTH AMERICA

Product brand	EnviroCube Global			Pro Series			UL2085
Product image							
Model number	E3000	E6000	E12000	P12	P31	P69	PAT10
Brim fill capacity (USG/L)	3,014 / 11,410	6,390 / 24,190	11,990 / 45,387	3,223 / 12,200	8,189 / 31,000	18,175 / 68,800	2,822 / 10,682
Safe fill capacity (USG/L)	2,742 / 10,379	5,815 / 22,013	11,390 / 43,115	3,068 / 11,614	7,846 / 29,700	17,356 / 65,700	2,562 / 9,698
Stationary (move empty only)	Stationary						
Containment	110% Bunded - double walled						
Approvals	UL/ULC, NFPA, UN DOT, TRANSPORT CANADA, PPG2					UL/ULC,NFPA, UL2085	


<div></div> <div>Pumping and dispensing</div>	Remote Fill Box Assemblies I Includes Remote Mount Spill Containment ULc Listed, and 3” Flexible Connection line to top fill point on tank.						
	Example photo	Application	Description				
		WESTERN:Remote Fill Spill Box Kit with 3” Connection Line	PREMIUM: Remote fill container & 3” Connection Line Kit <ul style="list-style-type: none">• 15 gallon capacity• Gas spring cylinder holds the lid in the up position when fueling• Lockable with a padlock• 1” NPT drain with locking ball valve• Four leg stand ships knocked down and requires minimal assembly- Included is 3” SS Flex Line to Top of Tank, gaskets, studs & Nuts- ships as a Kit for field installation*		WG-E-RFP	N/A	WG-EPT-RFP
<div></div> <div>Gauges Metering and Management</div>	Tank Gauge Assemblies						
	Example photo	Application	Description				
		WG-TGK-P(Kit Comprised of: 1218C--0200 AC, 1218S--2500 AS, 1218S--2543 CC)	PREMIUM Electronic Tank Gauge Kit - monitors and displays the liquid level and/or volume of product stored in 1 tank. The tank sensor utilizes a mechanical float to monitor the tank liquid level. System Console Features <ul style="list-style-type: none">• Level units: feet and inches or centimeters, Volume units: gallons or liters, Visual and audible alarm indication, 0-4 level alarm set points, 2 output relays—3 Amps @ 240 VAC,NEMA 4X indoor/outdoor weather protected, lockable enclosure, Ethernet connectivity, Email and SMS text alarm notification, Modbus RTU and TCP interface configuration Included in the Kit is a 25’ Tank Level Sensor Featuring:<ul style="list-style-type: none">• 2 dry contact, intrinsically safe inputs per tank level sensor• 25’ tank sensor accuracy +/- 0.3”;		WG-TGK-P	WG-TGK-P	WG-TGK-P
		WG-TGK-B(1518---2500 AG)	BASIC Mechanical tank gauge designed to mount on top of Western's tanks and provides a readout in feet and inches. Features: <ul style="list-style-type: none">- Easy to read from wide viewing angle,- Easy to install and calibrate, Installs through 2” tank bung, Vapor tight to allow for standard tank pressure testing and sealing up to 5 PSI.		WG-TGK-B	WG-TGK-B	WG-TGK-B
	Tank Alarm Assemblies						
Example photo	Description						
	MECO Model # 200400ARL - AST Overfill Alarm is battery-operated, intrinsically safe audible/visual overfill alarm in our standard finish. · Loud (100 db) pulsating alarm and bright flashing LED light will alert the operator when the product level reaches the pre-set level. <ul style="list-style-type: none">· Certified Intrinsically Safe to ANSI/UL 913.· Meets NFPA 30A, UL 2244 and UFC Requirements.· 9 V dc Battery Powered (battery not included). Lithium battery is recommended in all installations for extended life.· No power consumption in the “Non-alarm” condition provides years of life from a Lithium battery.· Optional connections for 12 V Intrinsically Safe line power supply.· Single push-button switch for test before filling tank and to reset the Audible Alarm after the high-level alarm point is reached.· Float switch adjustment range is from 12 to 20 inches. Further adjustments can be accomplished using pipe nipples by following the instructions provided with the alarm			200400ARL-12V	200400ARL-12V	200400ARL-12V	
Fuel Management Systems							
Preferred Partners	Description						
  	Range of Fuel Management System Packages Available. Please contact our technical sales team for further details & quotes on specific packages that best meet your application: techsupport.na@western-global.com						

LARGE TANK & ACCESSORY
QUICK REFERENCE


NORTH AMERICA

Product brand	EnviroCube Global			Pro Series			UL2085
Product image							
Model number	E3000	E6000	E12000	P12	P31	P69	PAT10
Brim fill capacity (USG/L)	3,014 / 11,410	6,390 / 24,190	11,990 / 45,387	3,223 / 12,200	8,189 / 31,000	18,175 / 68,800	2,822 / 10,682
Safe fill capacity (USG/L)	2,742 / 10,379	5,815 / 22,013	11,390 / 43,115	3,068 / 11,614	7,846 / 29,700	17,356 / 65,700	2,562 / 9,698
Stationary (move empty only)	Stationary						
Containment	110% Bunded - double walled						
Approvals	UL/ULC, NFPA, UN DOT, TRANSPORT CANADA, PPG2					UL/ULC,NFPA, UL2085	

Ladder Guard Kits | Includes the necessary components to mount to the ladders on container tanks

Example photo	Kit	Description				
	ASMC-000033	Fall Arrest Cage for P Series Ladder		N/A	ASMC-000033	N/A


Ladder Kits | Includes the necessary components to mount to the ladders on tanks without standard ladders

Example photo	Description					
	Bolt on Ladder & Platform Kit for Tank with Railings & fall arrest cage for EnviroCube Pro Series Tanks		WG-ILK-E	N/A: This Tank Includes Integral ladder	WG-ILK-EPT Tank	

Containment Evacuation Pump Kits & Spill Kits | Includes the necessary components to mount to the tanks








Example photo	Description					
	HAND Pump on Mounting Plate with Discharge Hose, Nozzle, and Suction Hose and valve for Evacuation of Sump		N/A	K1N	N/A	
	WESTERN: 15 GALLON UNIVERSAL SPILL KIT - FULLY LOADED..Contents: 20 – 17x17 universal spill socks; 3 – 3”x48” universal spill socks; Poly drain cover; 8oz. plug n dike putty; Splash goggles; Disposal bag & tie; Chemical splash gloves.		TT-15GALUS	TT-15GALUS	TT-15GALUS	

Fire Extinguishers

Eample photo	Kit	Description				
	TT-20ABC	WESTERN: 20 LBS. ABC FIRE EXTINGUISHER CERTIFIED	TT-20ABC	TT-20ABC	TT-20ABC	TT-20ABC
	TT-20HDTB	WESTERN: Heavy-Duty Bracket for 20 LB. Fire Extinguisher	TT-20HDTB	TT-20HDTB	TT-20HDTB	TT-20HDTB

LARGE TANK & ACCESSORY
QUICK REFERENCE

NORTH AMERICA

Product brand	EnviroCube Global			Pro Series			UL2085
Product image							
Model number	E3000	E6000	E12000	P12	P31	P69	PAT10
Brim fill capacity (USG/L)	3,014 / 11,410	6,390 / 24,190	11,990 / 45,387	3,223 / 12,200	8,189 / 31,000	18,175 / 68,800	2,822 / 10,682
Safe fill capacity (USG/L)	2,742 / 10,379	5,815 / 22,013	11,390 / 43,115	3,068 / 11,614	7,846 / 29,700	17,356 / 65,700	2,562 / 9,698
Stationary (move empty only)	Stationary						
Containment	110% Bunded - double walled						
Approvals	UL/ULC, NFPA, UN DOT, TRANSPORT CANADA, PPG2					UL/ULC,NFPA, UL2085	



Tank and accessories

Basic OilField Skids									
Eample photo	Type	Size	Description						
	Skid for CSC Tanks	W10 beam	10' I Beam Skid with Pull Bars		N/A	WG-SKID-P12-A001	N/A	N/A	N/A
			20' I Beam Skid with Pull Bars			WG-SKID-P31-A001			
			40' I Beam Skid with Pull Bars		N/A	N/A	WG-SKID-P69-A001		
Roller Shutter Door Upgrade Kits IALUMINUM MANUAL PUSH-UP - S1/PADLOCK HASPS									
Example photo	Description	Type	Size	Material					
	Roll Shutter Door Upgrade Kit for p Series Cabinet Style Tanks	560 SERIES SHUTTER	87 " (2,209.8 MM) wide x 70 1/2 " (1,790.7 MM) high	Aluminum	N/A		WG-SHTR-DR-PSER-A001		N/A
Custom Branded Decal Kits* I Includes two decals per kit, up to three colors, using customer supplied logo artwork									
Example photo	Type	Size	Decal Qty						
	Vinyl, die-cut	12"H x 36"L	2			CUSTOM-DDK.002			
	Vinyl, die-cut - Large Size	24"H x 96"L	2			CUSTOM-DDL.002			

TRUCK OR TRAILER TANK? FLEXIBILITY FOR FUEL ON THE MOVE



Fuel distributor, Foster Blue Water, had been transitioning to our mobile tanks through customer demand. A client on a 2-year wind power installation needed flexible fuel supplies, without tying up capital in a full-size truck — and avoiding breakdown and repair.

Getting clean energy into dirt equipment, generators and off-road kit was essential to keep their project on track. We suggested our robust TransCube Cab. It's easily maneuverable, even with tight access, and holds an impressive 1,200 gallons. Any pick-up can hook up to it, and there was the opportunity to add more trailers to match demand, for an agile delivery system, instead of a single, unwieldy truck.

LOCATION
Michigan, US

DEMAND
Fuel during wind power installation

SOLUTION
TransCube Global and pump

RESPONSE
Reliable fuel across a moving site

“TRAILORIZED STORAGE DOESN’T
BREAK DOWN OR REQUIRE SPECIALIST
DRIVERS — AND CAN TRAVERSE LARGE
SITES IN MINUTES.”

Keeping costs down, and secure fuel on the move

A transportable fuel trailer is 90% cheaper to buy than a truck, can be towed by almost anything on-site — and doesn't get stuck in tight spots or over rough terrain. We advised an H50TCG with a 50-foot hose and Fillrite pump — for portability, reliability and security. Trailorized storage doesn't break down or require specialist drivers — and can traverse large sites in minutes, providing environmentally secure energy to equipment, plant and generators. Mounted on a type approved trailer, it's also ideal for road work when fuel needs transporting across highways in total compliance. It's fast, cost-effective — and ready when you need it.

FUEL CHAIN: POWERING THE USA'S BIGGEST CONSTRUCTION SITE

With over 5,000 workers on-site, Bechtel needed a modular fuel chain for storing and supplying on and off-road diesel and gasoline. We were ready for the challenge of keeping the largest construction project in the US fueled in extreme conditions.

With 14-million USG of fuel going through the facility, they needed unloading and dispensing sheds as a fast and efficient way to refuel vehicles. It required a modular, plug and play design to flex with demand and cope with heavy handling. Our TransTank solution is engineered for fuel farms and temporary power plants. Their modular design delivers large-scale connectivity from an impressively small footprint.



“THE SIMPLE, PLUG AND PLAY DESIGN DEMANDS LOW MAINTENANCE AND
ENSURED FAST, EFFICIENT REFUELING TO KEEP THE VAST PROJECT ON-TRACK.”



A FUEL CHAIN FOR UNLIMITED DEMAND

By seamlessly connecting six TransTank units, we created the ultimate fuel chain, holding 90,000 US gallons, to service every type of construction equipment in the most extreme conditions. The simple, plug and play design demands low maintenance and ensured fast, efficient refueling to keep the vast project on track. These proven container tanks can be bolted together to flex capacity throughout the lifetime of any large-scale project. They ensure continuity and safety, eliminating costly stoppages — and are a defense against loss through theft or leakage. TransTank is globally recognized as the best bulk solution by construction managers and power generation professionals.

WESTERN[®] GLOBAL



Response ready fuel solutions

DISTRIBUTED BY

CARSON[®]
OUR CUSTOMERS | OUR PEOPLE | OUR COMMITMENT

T: 800 998 7767 | **W:** carsonteam.com

